

SUBMITTAL DATA - OUTDOOR UNIT LAC060-100P431 LCAC TOP DISCHARGE CONDENSER

Job:	Engineer:	
Location:	Architect:	
Schedule No.:	Date:	
System Designation:		

FEATURES

- 24V control
- Refrigerant leakage detection

SPECIFICATIONS		
PERFORMANCE		
Cooling Capacity (Btu/h)		60,000
Heating Capacity (Btu/h)		/
Airflow (CFM)		3824
Ambient Temperature Operating Range		1
Co	oling	64°F(18°C)-109°F(43°C)
He	ating	/
External Static Rated Pressure (Pa)		
External Static Pressure Range (Pa)		/
ELECTRICAL DATA		
Power Supply (V/Hz/ φ)		220-230/60/1
MOP (A)		/
MCA (A)		/
No. of Compressors		1
No. of Fans		1
GENERAL DATA		
Combination Ratio Indoor / Outdoor		100%
Max. # of Indoor Units		1
Sound Pressure Level (dBA)		64.4
Refrigerant Type		R410A
Factory Refrigerant Charge		4.84 lbs. 77.44 oz.
DIMENSIONS		
Unit Dimensions (in) He	eight	33.2
V	Vidth	28.0
D	epth	28.0
Liquid Pipe Connection (in)		3/8"
Gas Pipe Connection (in)		3/4"
Shipping Weight (lb)		187
Net Weight (lb)		176

PRODUCT WARRANTY

5 Year Limited Warranty*




Over-current Protection

• Compressor three minutes Delay at Restart

Model No.: LAC060-100P431 CAT No.: Y6890





OPTIONAL ACCESSORIES


NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency



NOTES

Cooling and Heating Capacity data is rated at the following conditions: Cooling: 80°FDB / 67°FWB Indoor, 95°FDB/ 75°FWB Outdoor Heating: 68°FDB / 59°FWB Indoor, 45°FDB/ 43°FWB Outdoor

DIMENSIONAL DRAWINGS - INCHES (MM)

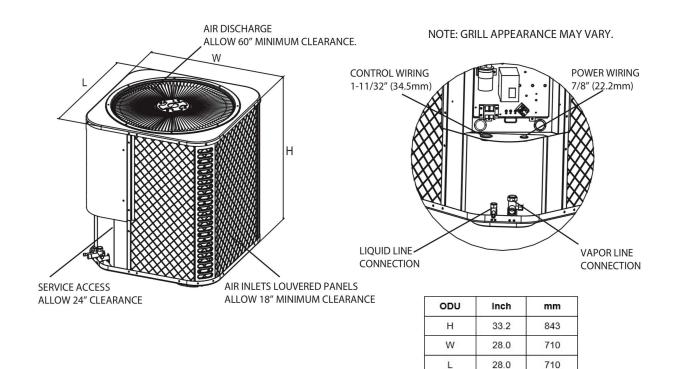

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency